



innovative construction product assessments

Certificate No. 2018/588

APPLICATIONS


- 1 Road Potholes
- 2 Road Repairs
- 3 Speed Humps
- 4 Traffic Circles / Roundabouts
- 5 Road Skin Patching
- 6 Road Shoulders
- 7 Trenches
- 8 Parking Areas
- 9 Tennis Courts
- 10 Road Crack Sealer



BENEFITS

- 1 Only laymans labour and handheld based-tools are required.
- 2 Spade, Pick, Rake, Broom, Hand Stamper or Plate Compactor tools are required.
- 3 No Primer or Base Coat is required for potholes less than 1m².
- 4 12 Months Shelf Life (under cover storage) Guarantee.
- 5 Product can be used in hot or cold weather.
- 6 Can be used in adverse weather conditions.
- 7 Unique binding capability.
- 8 Stick to tar surface, concrete and paving bricks.

SAFETY FIRST



Use high visibility traffic cones and flags to alert traffic.



Always wear visible reflective clothing.



Always wear protective clothing.

Prevention is better
than cure

5 EASY STEPS To Repair Potholes

Roadsaver
Pothole Filler

Manufactured and Supplied
by
Road Saver Group (Pty) Ltd
Plot 445, Mooiplaats
Pretoria East

Contact Details

Wilco - 061 496 3212
wilco@roadsaver.co.za

Fred - 083 633 1028

Breon - 084 777 5366
sales@roadsaver.co.za

DO NOT USE

- 1 Do not add Petrol, Diesel or Chemicals to the product.
- 2 No heat applied to product.
- 3 See that tools are clean before applying.

NOTE:

Roadsaver Coldlay Surfacing System

It's not a sub base or base course material.


Manufacturing and application of this product is 90% labour intensive.

The premix contain petroleum additive and bitumen.

Supplied in 25kg virgin plastic bags (175 micron).

POTHOLE REPAIRS

No. **1** Assess size of pothole.

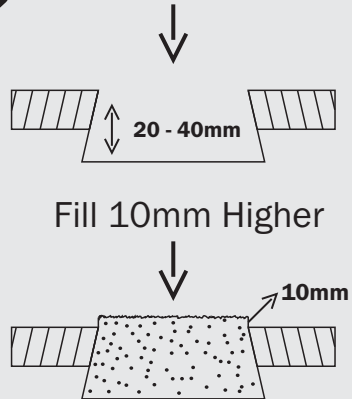

Assess the road base and pothole bottom using a pick and spade, cleaning the edges of the pothole sides, clean pothole with broom.

No. **2** Prepare Pothole



Prepare the road base and pothole bottom using a pick and spade. Start by cleaning the edges of the pothole.

Roadsaver

No. **3** Prepare Pothole



Remove rubble and sweep clean all loose waste particles inside hole with broom. No priming required for up to 1 square meter. Ready to fill pothole.

No. **4** Fill Pothole

Fill pothole with Roadsaver pothole filler. After compacting the pothole, center must be at least 10mm higher than road surface.



No. **5** Method of Compacting

Compact until the surface is smooth and level with the existing road. Clean road area and open road for traffic.

3 Types of compaction can be used:

- 1 Hand Stamper
- 2 Plate Compactor
- 3 Walk-Behind Roller

See that compacting is done in layers of 20mm at a time. Build up to 10mm above road surface level. Compact until stabilised to secure complete integration into existing road.

